

Over 5000 VXI cards and mainframes in stock. 1000's of pieces of Test Equipment in stock.



Looking for Test Equipment?
Visit us on the web at
www.recycledequipment.com

Recycled Equipment buys, sells, and repairs VXI cards, VXI mainframes and Test Equipment. We have tens of thousands of pieces of Electronic Test Equipment and one of the worlds largest selections of VXI cards. We have VXI cards by almost every manufacture; from Agilent to Ziatech. **Every item on our website is IN STOCK and ready to ship with in 24 hours.**


Sell your equipment for cash

Recycled Equipment is interested in buying your surplus equipment! Call us today at **(410)685-1997** or email to **recycled@usimperio.com**

Sell your equipment on consignment

Recycled Equipment can sell your equipment on consignment. This allows you to get retail prices for your equipment with out the hassle.

(410)685-1997 sales@recycledequipment www.recycledequipment.com

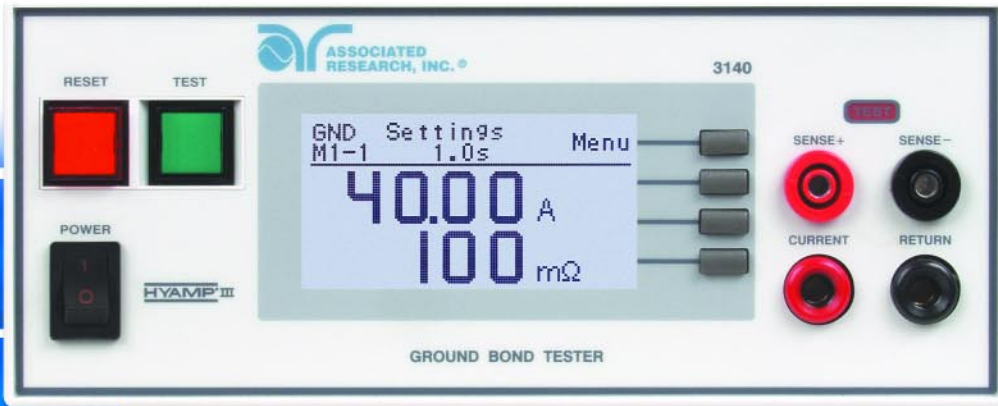

U.S. Patents: 6,744,259, 6,515,484.

HYAMP® III



Production Line Ground Bond Testers

Designed to thoroughly check the integrity of a safety ground circuit

Model 3130

30 Amp Ground Bond Tester

Model 3140

40 Amp Ground Bond Tester

Model 3160

60 Amp Ground Bond Tester

Features and Benefits

- Patented VERI-CHEK® feature prompts users through steps to validate the instrument's operation
- Graphic LCD provides intuitive menu system to simplify the entire testing process from set-up to results
- Patented CAL-ALERT® feature alerts the operator that the tester is due for re-calibration
- PLC Remote Control allows operators to remotely control the Ground Bond tester
- 10 Memories with 3 Steps per memory for storing and recalling test parameters
- Interconnects with an Associated Research Hipot tester to form a complete test system
- 4 wire measurement and milliohm offset for accurate Ground Bond test results
- Electronic Dwell timer for more consistent and reliable testing



www.asresearch.com
1.800.858.TEST [8378]

13860 W. Laurel Dr., Lake Forest, IL USA 60045-4546 ■ P: +1.847.367.4077 ■ F: +1.847.367.4080 ■ info@asresearch.com

Recycled Equipment (410)685-1997 www.recycledequipment.com email: sales@recycledequipment.com

Input Specifications

Voltage	115/230 VAC ± 10%, user selectable
Frequency	50/60 Hz ± 5%
Fuse - 3130	6.3 A, slo-blow 250 VAC
Fuse - 3140	10 A, slo-blow 250 VAC
Fuse - 3130	15 A, slo-blow 250 VAC

Ground Bond Test Mode

Output Rating	Current 3130: 1.00 - 30.00 A AC Voltage 3130: 6 V AC, fixed Current 3140: 1.00 - 40.00 A AC Voltage 3140: 8 V AC, fixed Current 3160: 1.00 - 60.00 A AC Voltage 3160: 9 V AC, fixed Resolution: 0.01 A Regulation: ± (2% of setting + 0.02 A)
Output Frequency	Range: 50 / 60 HZ, User Selectable
Dwell Time Setting	Range: 0 and 0.5 - 999.9 secs 0 for continuous running Resolution: 0.1 sec Accuracy: ± (0.1% of setting + 0.05 secs)
Maximum & Minimum Limits	Range 3130: 0 - 120 mΩ for 1 - 30.00 A 0 - 510 mΩ for 1 - 10.00 A Accuracy 3130: ± (2% of setting + 2 mΩ) Range 3140: 0 - 150 mΩ for 30.01 - 40.00 A 0 - 200 mΩ for 10.01 - 30.00 A 0 - 600 mΩ for 1.00 - 10.00 A Accuracy 3140: ± (3% of setting + 3 mΩ) Range 3160: 0 - 150 mΩ for 30.01 - 60.00 A 0 - 300 mΩ for 15.01 - 30.00 A 0 - 600 mΩ for 6.00 - 15.00 A Accuracy: ± (3% of setting + 3 mΩ)
Offset Capability	Range: 0 - 100 mΩ Resolution: 1 mΩ Accuracy: ± (2% of setting + 2 mΩ)
Current Display 3130	Range: 0.00 - 30.00 A Resolution: 0.01 A / step Accuracy: ± (2% of reading + 0.02 A)
Current Display 3140	Range: 0.00 - 40.00 A Resolution: 0.01 A Accuracy: ± (3% of reading + 0.03 A)
Current Display 3160	Range: 0.00 - 60.00 A Resolution: 0.01 A Accuracy: ± (3% of reading + 0.03 A)
Ohmmeter Display 3130	Range: 0 - 510 mΩ Resolution: 1 mΩ / step Accuracy: ± (2% of reading + 0.02 A)
Ohmmeter Display 3140	Range: 0 - 150 mΩ for 30.01 - 40.00 A 0 - 200 mΩ for 10.01 - 30.00 A 0 - 600 mΩ for 6.00 - 10.00 A Resolution: 1 mΩ Accuracy: ± (2% of reading + 2 mΩ) Range: 0 - 600 mΩ for 1.00 - 5.99 A Resolution: 1 mΩ Accuracy: ± (3% of reading + 3 mΩ)

Ground Bond Test Mode (Continued)

Ohmmeter Display 3160	Range: 0 - 150 mΩ for 30.01 - 60.00 A 0 - 300 mΩ for 15.01 - 30.00 A 0 - 600 mΩ for 6.00 - 15.00 A Resolution: 1 mΩ Accuracy: ± (2% of reading + 2 mΩ) Range: 0 - 600 mΩ for 1.00 - 5.99 A Resolution: 1 mΩ Accuracy: ± (3% of reading + 3 mΩ)
Timer Display	Range: 0.0 - 999.9 secs Resolution: 0.1 secs Accuracy: ± (0.1% of reading + 0.05 secs)

General Specifications

Remote Control & Signal Output	The following input and output signals are provided through two 9 pin D type connectors: 1. Remote control: Test, Reset, Interlock, and Withstand Processing 2. Remote recall of memory program #1, #2, and #3 3. Outputs: Pass, Fail, Test-in-process, Start Out and Reset Out
Program Memory	10 Memories, 3 steps per memory.
Security	Key Lock capability to avoid unauthorized access to all test parameters and memory locations.
Mechanical	Bench or rack mount with tilt up feet.
Dimensions 3130	(W x H x D) 8.5 x 4.0 x 15.5 in. (216 x 103 x 390 mm) includes feet
Dimensions 3140	(W x H x D) 8.5 x 4.0 x 16.9 in. (216 x 103 x 430 mm) includes feet
Dimensions 3160	(W x H x D) 16.9 x 5.1 x 15.7 in. (430 x 130 x 400 mm) includes feet
Weight 3130	19.15 lbs (8.7 kgs)
Weight 3140	30.9 lbs (14 kgs)
Weight 3160	49.40 lbs (22.40 kgs)
Calibration	Traceable to National Institute of Standards & Technology (NIST). Calibration controlled by software. Adjustments are made through front panel keypad in a restricted access calibration mode. Calibration information stored in non-volatile memory.

Available Accessories

Probe (38084)	Fixed tip 4-wire Ground Bond probe for use with the 3130.
Probe (38538)	Fixed tip 4-wire Ground Bond probe for use with the 3140.

Specifications subject to change without notice.



- Customer support & technical services
- 5-Year extended warranty*
- 24-Hour turn-around on calibrations
- Industry seminars, expert training & education programs
- Local sales offices throughout the world

*With annual calibration from Associated Research.

