

Over 5000 VXI cards and mainframes in stock. 1000's of pieces of Test Equipment in stock.



Looking for Test Equipment?
Visit us on the web at
www.recycledequipment.com

Recycled Equipment buys, sells, and repairs VXI cards, VXI mainframes and Test Equipment. We have tens of thousands of pieces of Electronic Test Equipment and one of the worlds largest selections of VXI cards. We have VXI cards by almost every manufacture; from Agilent to Ziatech. **Every item on our website is IN STOCK and ready to ship with in 24 hours.**

Sell your equipment for cash

Recycled Equipment is interested in buying your surplus equipment! Call us today at **(410)685-1997** or email to **recycled@usimperio.com**

Sell your equipment on consignment

Recycled Equipment can sell your equipment on consignment. This allows you to get retail prices for your equipment with out the hassle.

(410)685-1997 sales@recycledequipment www.recycledequipment.com





7016A 50Ω 2GHz Multiplexer

MULTIPLEXERS PER CARD: 2 (with isolated ground).
CHARACTERISTIC IMPEDANCE: 50Ω nominal.
CHANNELS PER MULTIPLEXER: 4.
CONTACT CONFIGURATION: 1 pole Form A common shield.
RELAY DRIVE CURRENT: 120mA.
CONNECTOR TYPE: SMA.
RECOMMENDED CABLE: RG-223/U.
TERMINATION: User supplied 50Ω SMB termination (on unselected inputs).
ACTUATION TIME: 8ms.
MAXIMUM VOLTAGE: Any terminal (center or shield) to any other center or chassis: 30V.
MAXIMUM CARRY CURRENT: 0.5A.
MAXIMUM CARRY POWER: 10VA up to 900MHz, 3VA @ 2GHz.
ISOLATION:
 Multiplexer to Multiplexer: >1GΩ.
 Center to Shield: >1GΩ, <50pF.
 Channel to Channel: >100MΩ.
RISE TIME: <200ps.
SIGNAL DELAY: <3ns; channels matched to 50ps.
CONTACT POTENTIAL: <6μV.
CONTACT RESISTANCE: 0.5Ω.
CONTACT LIFE: 3×10⁵ @ 30V @ 10mA.
 3×10⁵ @ 900MHz, 1W.
 1×10⁶ @ cold switching.
ENVIRONMENT: Operating: 0° to 50°C; up to 35°C at 80% RH.
 Storage: -25°C to 65°C.
EMC: Conforms with European Union Directive 89/336/EEC.
SAFETY: Conforms with European Union Directive 73/23/EEC.

AC PERFORMANCE:

For $Z_L = Z_S = 50\Omega$	≤10 MHz	≤100 MHz	≤500 MHz	≤1 GHz	≤2 GHz
Insertion Loss (dB):	<0.3	<0.6	<1.0	<1.3	<3.0
Crosstalk (dB): ¹					
Channel-Channel	<-90	<-80	<-65	<-55	<-45
Switch-Switch	<-90	<-80	<-70	<-65	<-45
VSWR	<1.06	<1.1	<1.2	<1.6	≤1.9

¹ Specification assumes 50Ω termination.

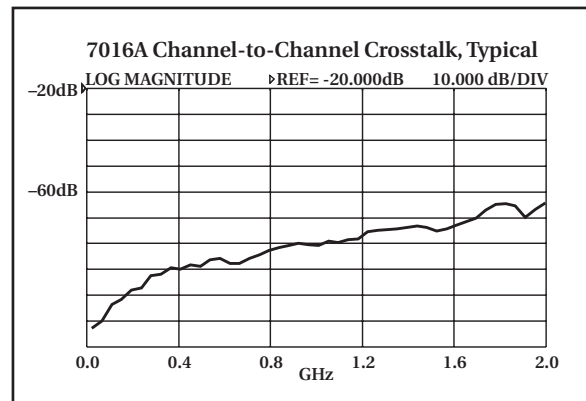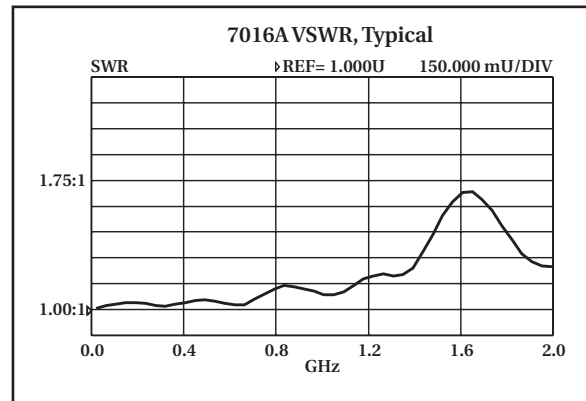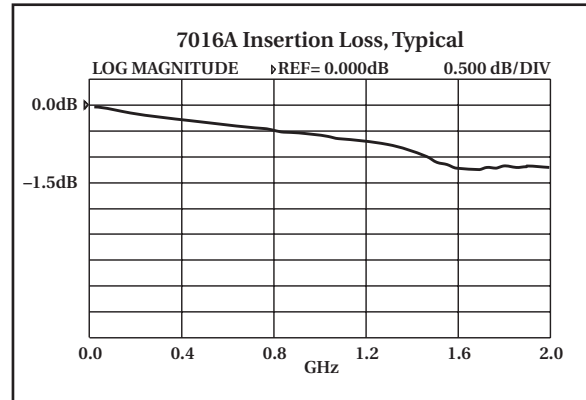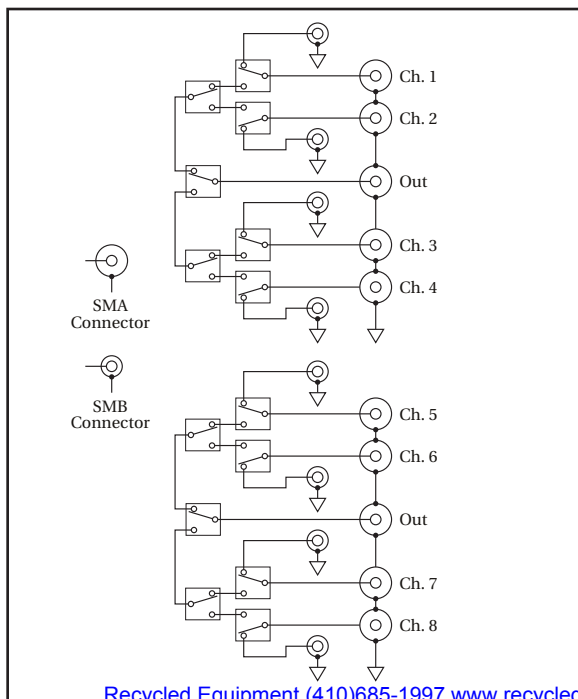

TYPICAL: Typical but not warranted parameter, intended to provide useful information for switch application.