

Over 5000 VXI cards and mainframes in stock. 1000's of pieces of Test Equipment in stock.



Looking for Test Equipment?  
Visit us on the web at  
[www.recycledequipment.com](http://www.recycledequipment.com)

Recycled Equipment buys, sells, and repairs VXI cards, VXI mainframes and Test Equipment. We have tens of thousands of pieces of Electronic Test Equipment and one of the worlds largest selections of VXI cards. We have VXI cards by almost every manufacture; from Agilent to Ziatech. **Every item on our website is IN STOCK and ready to ship with in 24 hours.**


### **Sell your equipment for cash**

Recycled Equipment is interested in buying your surplus equipment! Call us today at **(410)685-1997** or email to **recycled@usimperio.com**

### **Sell your equipment on consignment**

Recycled Equipment can sell your equipment on consignment. This allows you to get retail prices for your equipment with out the hassle.

**(410)685-1997 sales@recycledequipment www.recycledequipment.com**

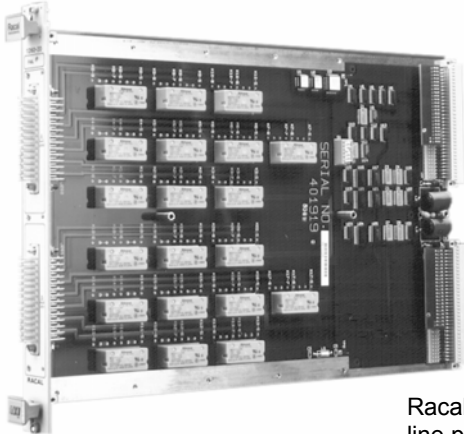

## Power Switch Module

- ◆ **Provides Switching for AC or DC Power Supplies and Current Sources**
- ◆ **Power Switch Networks May Be Configured from 20 Independent DPST Relays**
- ◆ **Switches up to 8 Amps at 250 VACrms or 5 Amps at 48VDC**
- ◆ **Carry Current up to 10 Amps**
- ◆ **Configured as 20 DPST Relays**

Racal Instruments 1260-20 is designed for high-current switching of AC line power, DC power supplies and AC or DC current sources. Power switch networks may be configured from twenty independent DPST switches. Up to 8 A at 250 VACrms or 5 A at 48 VDC may be switched through each two-wire channel.

Separate connections to both sides of the relay contacts permit each channel to function independently or to be configured as custom networks. Each channel features mounting holes for installation of series and shunt elements to serve as arc suppressors, filters, etc.

Relay coil current monitoring is available to provide confidence checking which gives the user assurance of proper relay operation.

The Option 01 or 01T switch controller is required to communicate with the 1260-20B. The Option 01 should be used for applications with existing Option 01 software, but for all new applications the Option 01T should be used. The Option 01T provides message-based operation for ease of use and register-based operation for maximum speed.

The Option 01T provides a single point of software control for the switching system with advanced features such as include, exclude, scan, relay monitoring, user defined path names, and reset states.

The 1260 series includes VXIplug&play support for WIN95/NT frameworks, including drivers for LabWindows/CVI and LabView.

# 1260-20 PRODUCT SPECIFICATIONS

## Maximum Switchable Voltage

(Terminal-Terminal or Terminal-Chassis)  
250 VDC or ACrms , 380VAC peak

## Maximum Switchable Current

(DC or ACrms)  
Per Channel: 8A  
Per Module: 160A

## Maximum Switchable Power

Per Terminal: 150WDC, 2000VA

## AC PERFORMANCE (into 50Ω)

### Capacitance

Open Channel: <20pF  
Channel-Chassis: <20pF  
High-Low: <50pF

### Bandwidth (-3dB)

30MHz

### Insertion Loss

100kHz: < 0.1dB  
1MHz: < 0.1dB  
10MHz: < 1.5dB

### Crosstalk

100kHz: < -60dB  
1MHz: < -40dB  
10MHz: < -20dB

## VXIBUS INTERFACE DATA

### Cooling Requirements

Airflow: 4.0 liters/sec  
Backpressure: 0.05mm H<sub>2</sub>O

### Power Requirements (I<sub>pm</sub>)

+5V: 0.4A (2.8A with Option 01 installed)  
+24V: 10mA per relay (energized)

### Weight

2.56lb (1.15kg) without Option 01  
2.84lb (1.28kg) with Option 01

### Dimensions

C-size, Single-slot VXIbus Module

## TYPICAL PROGRAMMING SYNTAX


### Programming syntax is in the form:

"<module address>.<channel number>"

### Example: CLOSE 3.04

This CLOSE statement will close channel number 4 on the 1260-20 at the card address 3.

**Note:** Module is supplied with one set of mating connectors and solder pins. Additional connectors and optional crimp type pins can be ordered using the part numbers shown below.

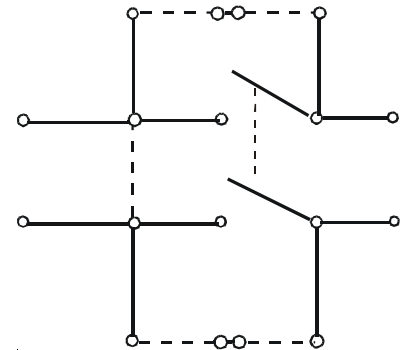

Model 1260-20B

Twenty independent relays. One channel is shown, with provision for addition of series and shunt elements.

## ORDERING INFORMATION

### MODEL/DESCRIPTION

Racal Instruments 1260-20, 20 Channel, DPST, 250V, 8A Switch  
Racal Instruments Option 01\*, Smart Control Module (Installed)  
Racal Instruments Option 01T\*, Smart Control Module (Installed)  
41-Pin Mating Connector Body  
Mating Connector Solder Type Pin  
Insertion Tool  
Extraction Tool  
Optional Crimp Type Mating Pins

\* Either an Option 01 or 01T must be ordered with switch system. Please specify the card on which the Option will be installed.

### PART NUMBER

404773  
OPT-401901-005  
OPT-407532-001  
601850  
601849  
9099  
9081  
602089-001

The EADS North America Defense Test and Services policy is one of continuous development, consequently the equipment may vary in detail from the description and specification in this publication.



EADS North America Defense Test and Services  
1.800.722.2528/1.949.859.8999 sales@eads-nadefense.com