

Over 5000 VXI cards and mainframes in stock. 1000's of pieces of Test Equipment in stock.



Looking for Test Equipment?
Visit us on the web at
www.recycledequipment.com

Recycled Equipment buys, sells, and repairs VXI cards, VXI mainframes and Test Equipment. We have tens of thousands of pieces of Electronic Test Equipment and one of the worlds largest selections of VXI cards. We have VXI cards by almost every manufacture; from Agilent to Ziatech. **Every item on our website is IN STOCK and ready to ship with in 24 hours.**


Sell your equipment for cash

Recycled Equipment is interested in buying your surplus equipment! Call us today at **(410)685-1997** or email to **recycled@usimperio.com**

Sell your equipment on consignment

Recycled Equipment can sell your equipment on consignment. This allows you to get retail prices for your equipment with out the hassle.

(410)685-1997 sales@recycledequipment www.recycledequipment.com

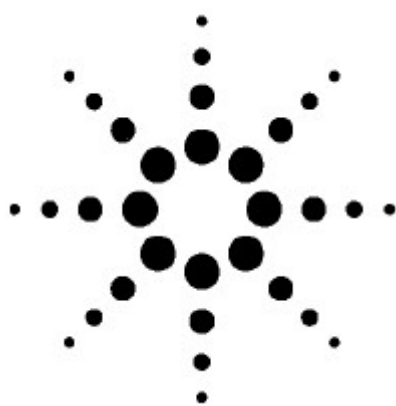

Agilent 87511A/B S-Parameter Test Set

Data Sheet

Parameter	Agilent 87511A	Agilent 87511B	Type
Frequency Range	100kHz to 500MHz		Specification
Directivity Port 1 & 2	> 30dB 100kHz to 300KHz > 40dB 300kHz to 200MHz >35dB 200MHz to 500MHz	> 30dB 100kHz to 300KHz > 33dB 300kHz to 500MHz	
Port match: R,A,B, RF IN	> 20dB		Typical
Switch Repeatability	+/- 0.03dB		Specifications
Source Match	> 15dB, 100kHz to 300kHz > 20dB, 300kHz to 500MHz		
Frequency Response	+/- 1dB		Typical
Insertion Loss RF IN to Port 1&2 RF IN to R,A,B	13dB 19dB	19dB 31dB	Nominal
Isolation between Port 1 and 2	110dB	100dB	Typical
Impedance Port 1&2 RF IN, R,A,B	50 Ohm 50 Ohm	75 Ohm 50 Ohm	Nominal
Connectors: Port 1 & 2	7mm (50 Ohm) 50 Ohm type-N(f) (option 001)	75 Ohm Type-N(f)	
Connectors: RF IN, R, A, B	50 Ohm type-N(f)		
Max. Input Level	+20dBm		
Dimensions	432mm x 90mm x 495mm		
Weight	5.7kg		



Agilent Technologies